


电源时序器

给予您的设备电源更好的规划、时序、保护、及调节。

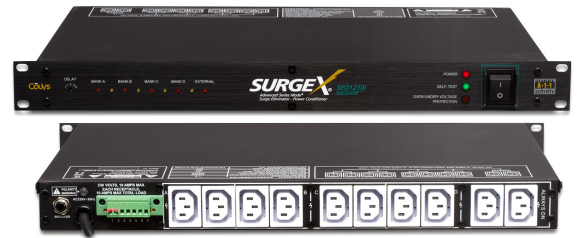

当一组电子设备必须按顺序通电开启及关闭时，使用电源时序器是必要的。尤其是在使用视听系统时，大多数时候都需要由时序器来控制电源的分布，以避免这些设备因电源不稳定而遭受损坏。

SurgeX 电源时序器配备了可调整的时序参数，电源调节、关机门槛设定、和电涌保护等功能，以保障各种音视频系统、广播器材、和电脑设备。这些时序器都配有完善的管理功能，并且非常容易安装调试及使用。设备带有2个不断电电源插座以及4个可编程的电库。

这些电源时序器拥有高级系列模式的电涌消除技术，是专为提供顶级的防护而制造。SurgeX 所使用的技术比起传统的金属氧化物变阻器更为优越。有别于一般的电涌保护技术，SurgeX 的专利电涌消除技术是非妥协性的，并且在不产生不良副作用的情况下能消除的能量高达6,000伏特的电压，而且不需要重设 - 类似于接地污染及共模干扰这些副作用会导致影音系统的性能下降。有了SurgeX，所有互相连接的设备器材都会不受到电涌、电感瞬变、及具破坏性的瞬间电压高峰等的电源不稳定性的干扰和破坏，给您提供完整的供电调节方案。

产品特性:

- 高级系列模式的电涌消除技术
- 4个时序功能电源（2插座一组）加上2个不断电电源插座
- 设备的设置存储于非易失性存储器
- 允许阻抗性的电磁干扰/射频干扰过滤
- 电压过高/过低系统自动关机
- SurgeX ICE 消除冲击电流
- 可用于控制其他SurgeX的设备，或是跟其他的电源时序器串联使用

	型号	电源插头特性		说明
		输入	输出	
	SEQ-1210i	 AS3112	 (11x) IEC	Programmable Sequencer Surge Eliminator, 1U, 10A/230V



AS3112

适用区域：
澳大利亚
中国
新西兰
斐济
巴布亚新几内亚

电源时序器

Technical Specifications

SEQ-1210i

Load Rating	10 Amps @ 230 Volts, 50Hz/60Hz (single phase)
Power Requirement (no load)	15 Watts
Number Of Sequenced Banks	4 (2 receptacles each bank)
Number Of Always On Receptacles	2
Surge Let-through Voltage (6000 Volt surge)	0 Volts
Safety Certification	IEC/EN 61643-1
Performance Rating	Grade A, Class 1, Mode 1
EMI/RFI Filter, Normal Mode (50 Ohm load)	40 dB @ 100 KHz, 50dB @ 300 KHz, 50 dB @ 3 MHz, 50 dB @ 30 MHz
EMI/RFI Filter, Common Mode (50 Ohm load)	18dB @ 300 KHz, 30 dB @ 1 MHz, 50 dB @ 5 MHz, 50 dB @ 20 MHz
Maximum Applied Surge Voltage	6000 Volts *
Maximum Applied Surge Current	Unlimited (due to current limiting) *
Maximum Applied Surge Energy	Unlimited (due to current limiting) *
Endurance (C62.41-1991 category B3 pulses)	1 KV > 500,000; 3 KV > 10,000; 6 KV > 1000
Undervoltage Shutdown	180 Volts (Auto resetting)
Overvoltage Shutdown	280 Volts (Auto resetting)
Remote Turn-on Applied Voltage Range	5 to 30 volts DC
Remote Turn-on Current Draw	Contact Closure: 1.0 mA 5 V DC Applied Voltage: 0.1 mA 12 V DC Applied Voltage: 0.5 mA 24 V DC Applied Voltage: 2.0 mA
Auxiliary Relay Contact Rating	12 Volts DC, 10mA (Resistor included)
LED Output	12 Volts DC, 10mA (Resistor included)
Delay Time Per Bank	2, 5, 10, 15, 20 seconds (switchable)
Dimensions	4.5cm H x 48.3cm W x 26.7cm D [Single Rack] 1.75" H x 19" W x 10.5" D
Weight	5.9Kg (13 lbs)
Temperature Range	5C to 35C
Humidity Range	5% to 95% R.H. Non-condensing

*1.2 x 50 μ s pulse, industry standard combination wave surge, as per IEEE C62.41

CAUTION: Do not install this device if there is not at least 10 meters (30 feet) or more between the electrical outlet and the electrical service panel.